



P0.30 IS USED FOR DATA CONFIGURATION  
 P0.30 IS PULLED UP BY DEFAULT, THEN  
 THE DATA WILL BE TRANSFERED THROUGH BT.  
 WHEN P0.30 IS SHORTED TO GROUND,  
 THE DATA WILL BE TRANSFERED THROUGH UART.


TITLE:	DATE:
ENGINEER:	PAGE:

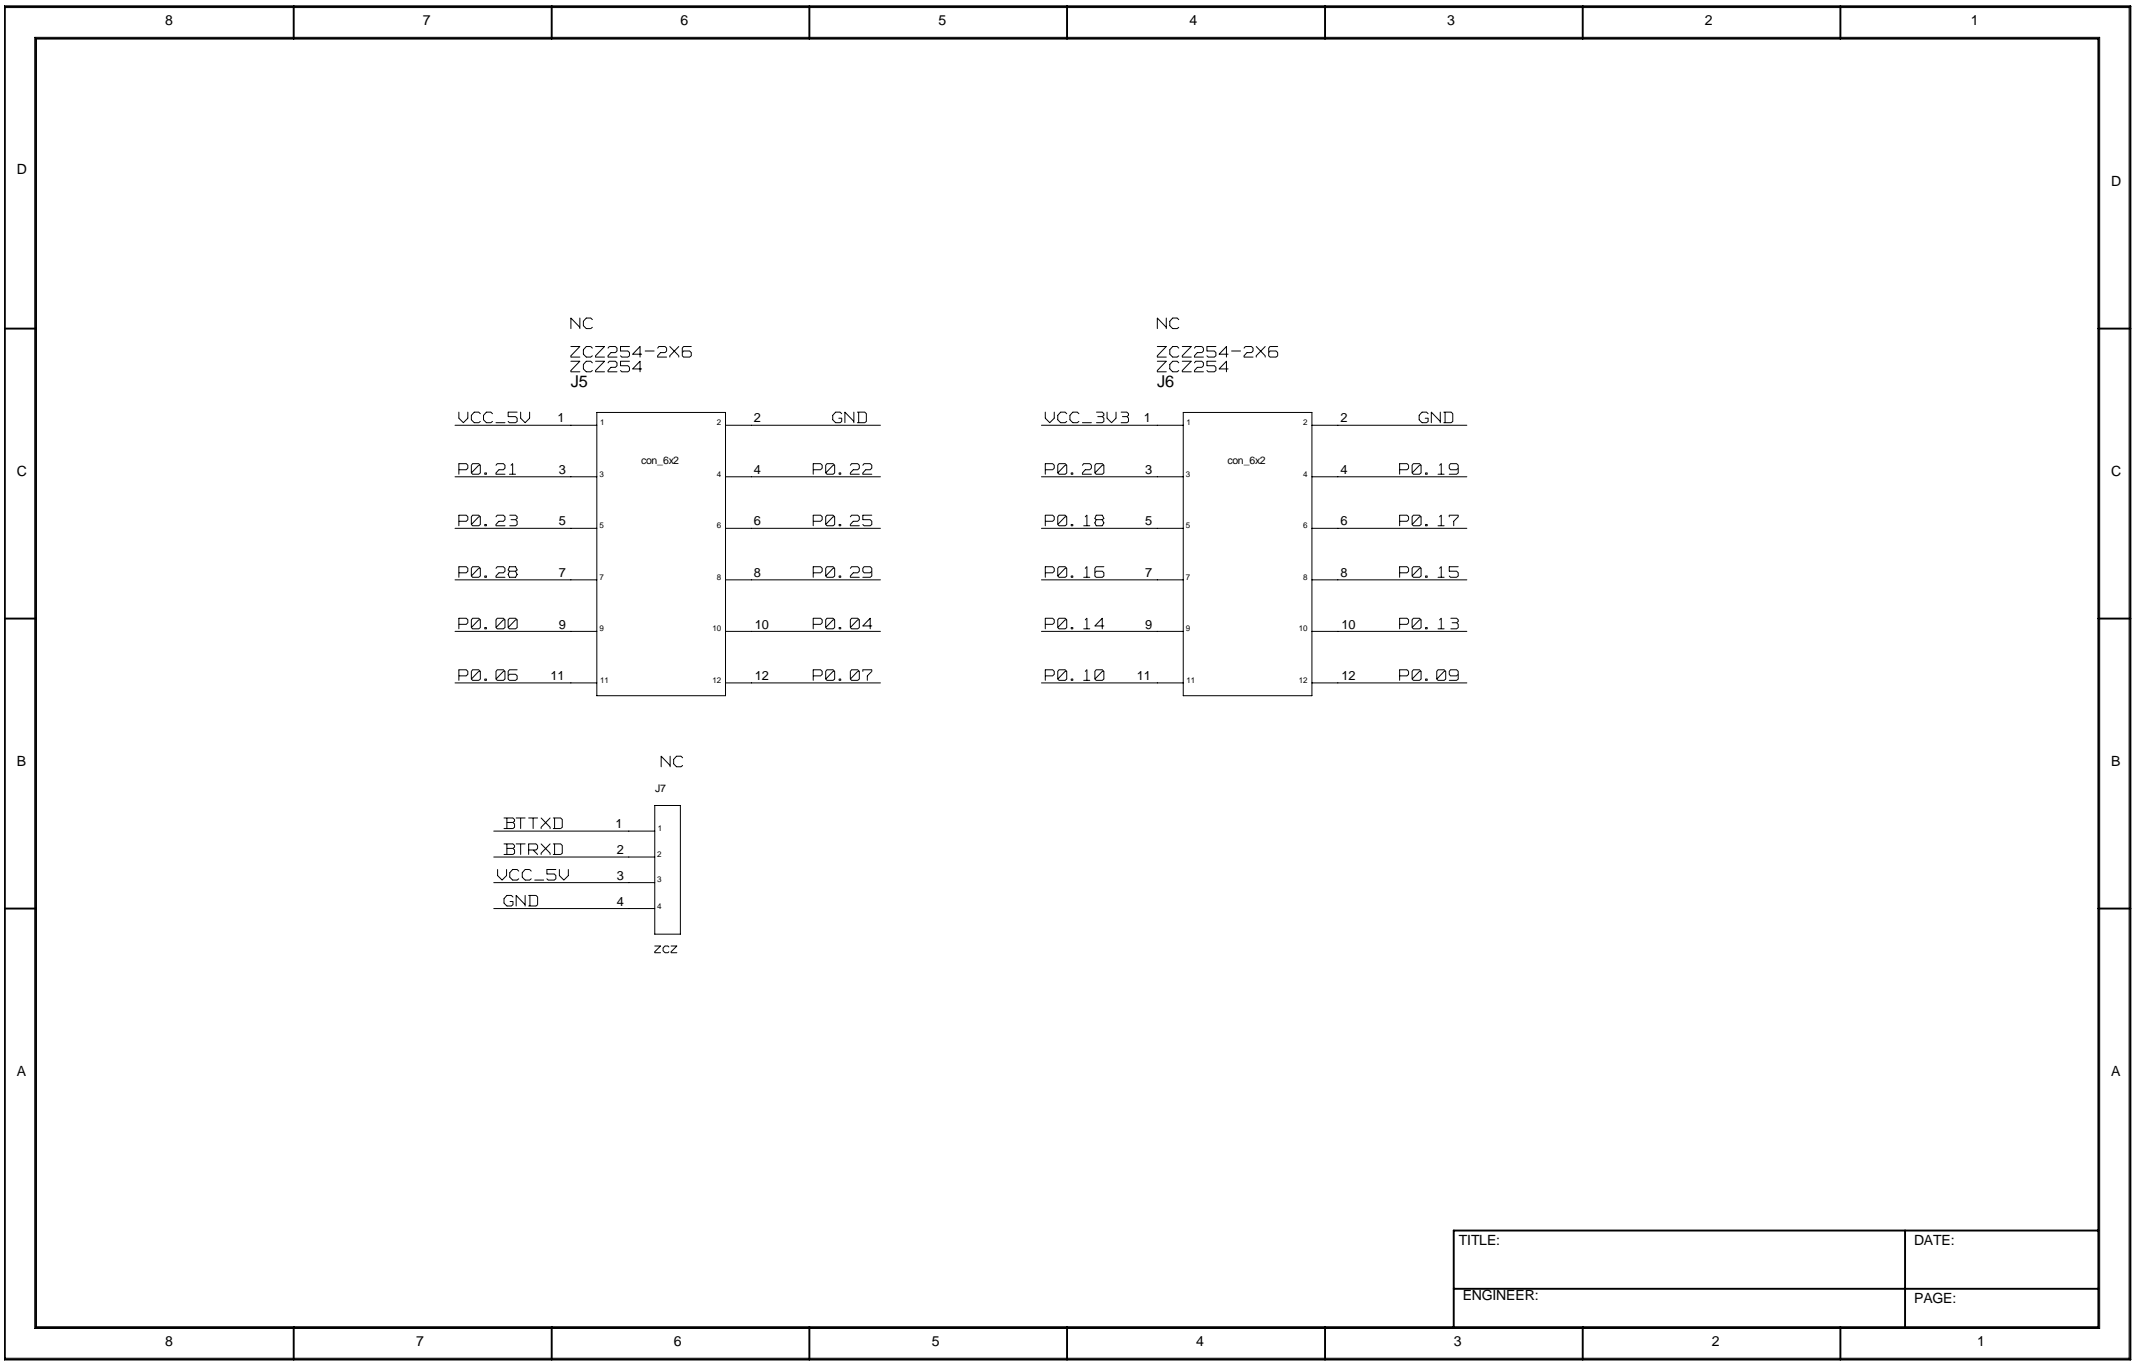


NC  
ZCZ254-2X6  
ZCZ254  
J5

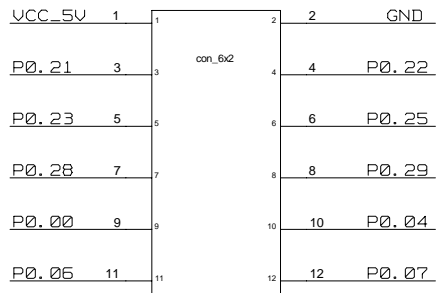

NC  
ZCZ254-2X6  
ZCZ254  
J6

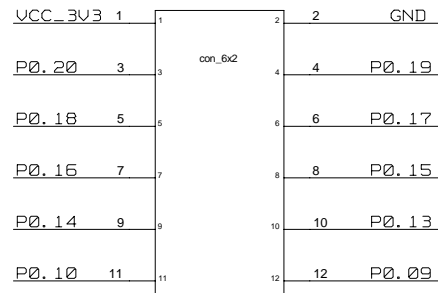

NC  
J7



TITLE:	DATE:
ENGINEER:	PAGE: